


VX900NS, VX900NF Codelocks

FEATURES

- Access control system with 100 codes and 2 relay outputs.
- Personal access code to go into the "Programming Menu" (from 4 to 8 digits).
- Programming of the working time of each relay from 1 up to 99 seconds or permanent (latching).
- Possibility to activate Relay 1 by shorting terminal "SW1" to GND and Relay 2 by shorting terminal "SW2" to GND. Both relays will operate for the programmed time.
- Possibility to activate both relay by programming the "user code" with "0" prefix.
 - 1) Keypad gives out an acoustic (buzzer) signaling during entering codes and a continuous melody for 4 or more seconds, according to the number of mistakes (self protection).
Keypad has got also a panel illumination (VX900-2L../F/S) and 2 LEDs to show the following:
 - 2) Correct relay code: green LED on for 2 seconds.
 - 3) Red LED always on while entering into the "programming menu".
- Contacts of the relays are available (N.O and N.C) with 5A max. 24V AC or DC.
- Power requirements for VX900: 12V AC, 2VA.

INITIALIZATION

When the installation is concluded and carried out according to the wiring diagram, power up the system and program it by the following "VX900 PROGRAMMING" Flow Chart.

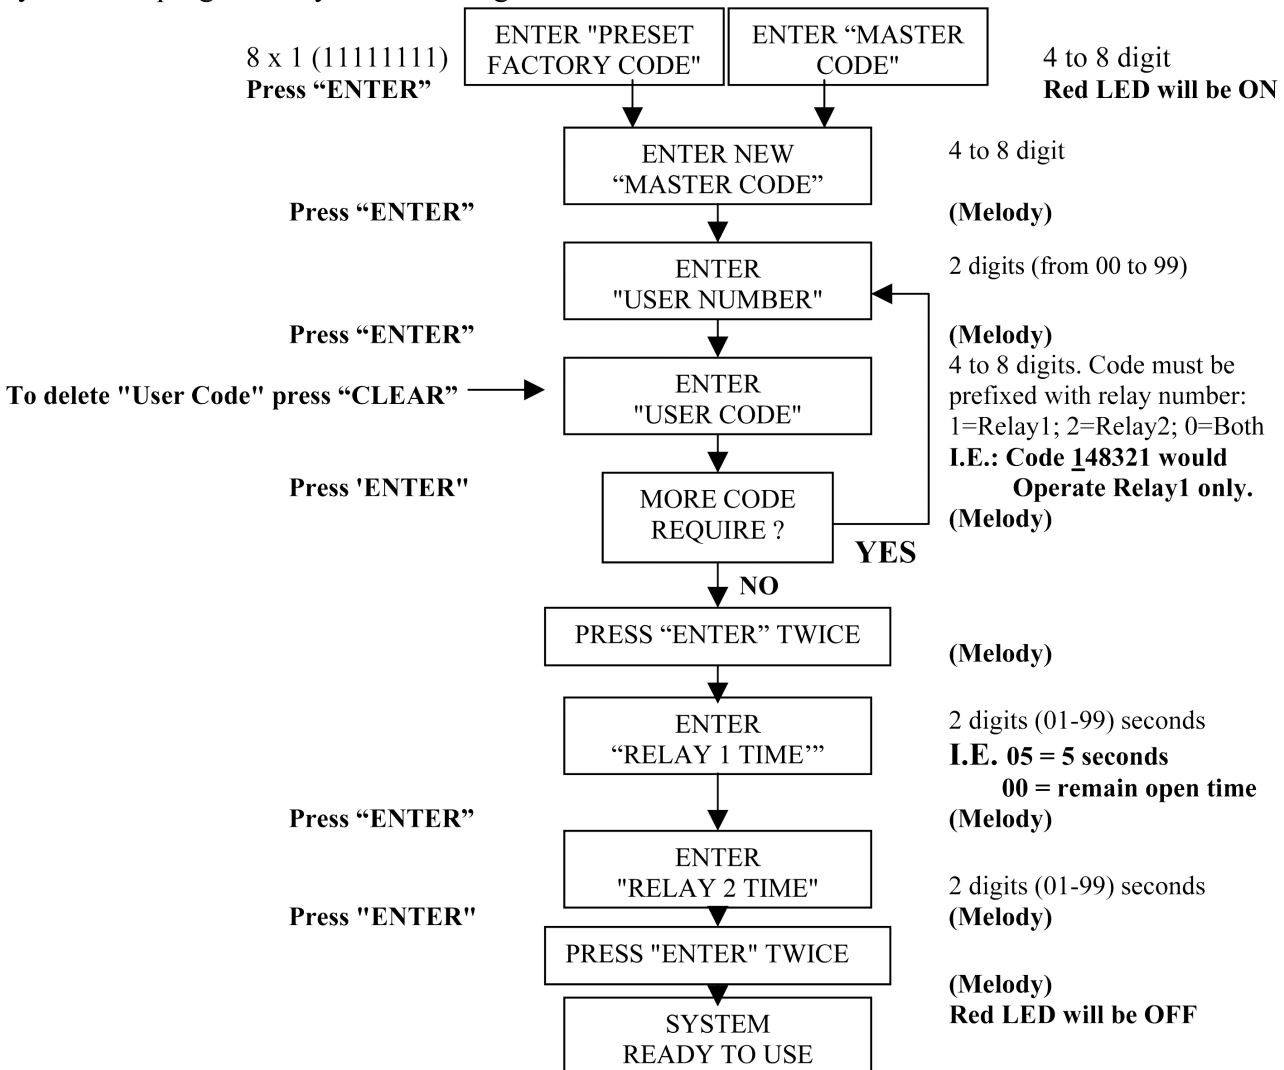

OPERATION

To use the system, type in the programmed code and press "ENTER" button, green LED will be on and relay will operate for the programmed time.

To cancel remain open time, type in same code and press "CLEAR" button.

If a wrong code is entered, a continuous melody will give out for 4 or more seconds, according to the number of mistakes.

* If help is required for installing or operating this unit, please contact our technical department on: +39 734 631669 (all countries) or 0191-224-3174 (UK)