


# MyGO

MYGO4/KR

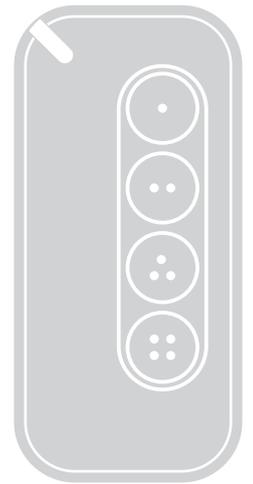

MYGO4/KR

## One-way transmitter

**EN** - Instructions and warnings for installation and use

## CONTENTS

<b>1</b>	<b>GENERAL SAFETY WARNINGS AND PRECAUTIONS</b>	<b>2</b>
<b>2</b>	<b>PRODUCT DESCRIPTION AND INTENDED USE</b>	<b>3</b>
2.1	List of constituent parts	3
2.2	Transmitter functions	3
<b>3</b>	<b>MEMORISING THE TRANSMITTER</b>	<b>4</b>
3.1	Transmitter verification	4
3.2	Memorising the transmitter	4
3.2.1	Memorisation in "Mode 1"	4
3.2.2	Memorisation in "Mode 2"	4
3.2.3	Memorisation in "Extended Mode 2"	4
3.2.4	Memorisation through the "ENABLING Code" (between an OLD transmitter already memorised and a NEW transmitter)	4
<b>4</b>	<b>REPLACING THE BATTERY</b>	<b>5</b>
<b>5</b>	<b>TRACEABILITY</b>	<b>6</b>
<b>6</b>	<b>PRODUCT DISPOSAL</b>	<b>6</b>
6.1	Battery disposal	6
<b>7</b>	<b>TECHNICAL SPECIFICATIONS</b>	<b>6</b>
<b>8</b>	<b>ACCESSORIES</b>	<b>6</b>
8.1	String for keyring	6



**CAUTION! – This manual contains important instructions and warnings for personal safety. Carefully read all parts of this manual. If in doubt, suspend installation immediately and contact the Nice Technical Assistance.**



**CAUTION! – Important instructions: keep this manual in a safe place to enable future product maintenance and disposal procedures.**

- The product packing materials must be disposed of in compliance with local regulations.
- Never apply modifications to any part of the device. Operations other than those specified may only cause malfunctions. The manufacturer declines all liability for damage caused by make-shift modifications to the product.
- Never place the device near to sources of heat and never expose to naked flames. These actions may damage the product and cause malfunctions.
- This product is not intended for use by people (including children) with reduced physical, sensory or mental capabilities or who lack experience and knowledge, unless they have been given supervision or instruction concerning the use of the product by a person responsible for their safety.
- Make sure that children do not play with the product.
- Handle the product with care, being sure not to crush, knock or drop it in order to avoid damage.
- The batteries must be removed from the appliance prior to its disposal.
- The batteries must be disposed of in a safe way.
- Do not swallow the batteries. Risk of chemical burns.
- This product contains a lithium coin battery. If swallowed, it can cause internal burns in just two hours or even death.
- If you think the batteries have been swallowed or placed in any part of the body, immediately contact a physician.
- If the battery compartment does not close tightly, stop using the product and keep it out of reach of children.
- The instruction manual is available at the following Internet address: [www.niceforyou.com](http://www.niceforyou.com), under the "support" and "download" sections.

## 2 PRODUCT DESCRIPTION AND INTENDED USE


The **MYGO4/KR** transmitter is designed for controlling automations (gates, garage doors, road barriers and similar).



**CAUTION!** – Any use other than that specified herein or in environmental conditions other than those stated in this manual is to be considered improper and is strictly forbidden!

### 2.1 LIST OF CONSTITUENT PARTS

“**Figure 1**” shows the main parts that make up the **MYGO4/KR** transmitter.

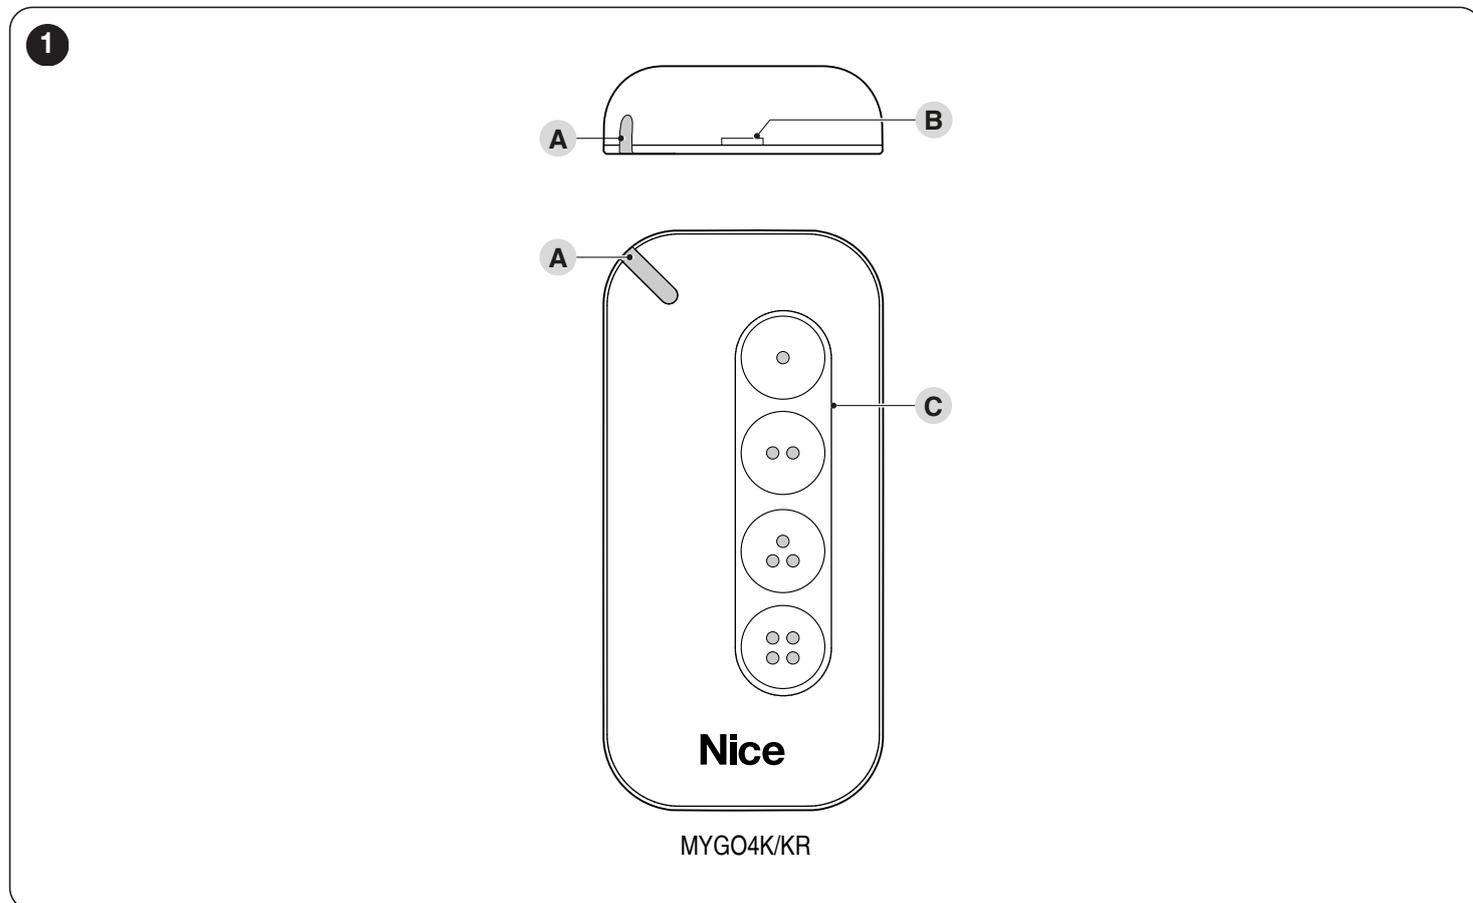

- A** Red signalling LED
- B** Hole for unlocking and removing the rear shell
- C** Control buttons area for models **MYGO4/KR**

### 2.2 TRANSMITTER FUNCTIONS


The **MYGO4/KR** transmitter adopts a specific one-way encoding system for **OXIO/KR** receivers.

## 3 MEMORISING THE TRANSMITTER

### 3.1 TRANSMITTER VERIFICATION

Before memorising the transmitter in the automation's receiver, ensure that it is working correctly by pressing any button while observing whether LED (A) lights up.

If LED (A) fails to light up, check the condition of the battery and replace it if necessary (refer to the **"REPLACING THE BATTERY"** paragraph on page 5).

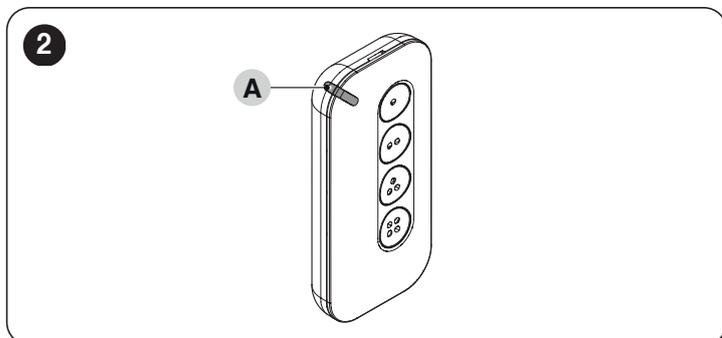

### 3.2 MEMORISING THE TRANSMITTER

To memorise the transmitter in a receiver, the following procedures can be adopted:

- memorisation in "Mode 1"
- memorisation in "Mode 2"
- memorisation in "Extended Mode 2"
- memorisation through the "Enabling Code" received from a previously memorised transmitter.



**These procedures are described in the instruction manual of the receiver or control unit with which the transmitter must be operated. The above-mentioned manuals are also available on the website: [www.niceforyou.com](http://www.niceforyou.com).**

#### 3.2.1 MEMORISATION IN "MODE 1"

This mode allows for memorising in the receiver, once only, all the transmitter command buttons, associating them **automatically** with each command managed from the control unit (default commands).



**Refer to the control unit instructions to identify the type of command that will be paired with each transmitter button.**

#### 3.2.2 MEMORISATION IN "MODE 2"

Allows for memorising in the receiver a single transmitter button, associating it with the commands managed from the control unit (maximum 4, chosen by the user).



**The same procedure must be repeated for each button to be memorised.**

#### 3.2.3 MEMORISATION IN "EXTENDED MODE 2"

This procedure is the same as the memorisation in "Mode 2", with the added possibility of choosing the desired command (to be paired with the button being memorised) in an **extended** list of commands managed from the control unit (up to 15 different commands).




**Refer to the control unit instructions to identify the extended list of commands.**

#### 3.2.4 MEMORISATION THROUGH THE "ENABLING CODE" (BETWEEN AN OLD TRANSMITTER ALREADY MEMORISED AND A NEW TRANSMITTER)


The **MYGO4/KR** transmitter has a secret code, the so-called "ENABLING CODE". By transferring this code from a memorised transmitter to a new transmitter, the latter is recognised (and memorised) automatically by the receiver.

To perform the memorisation procedure:


1. Draw the two transmitters close to one another, the **NEW** (New) one and the **OLD** (Old) one already memorised, as shown in **"Figure 3"**.

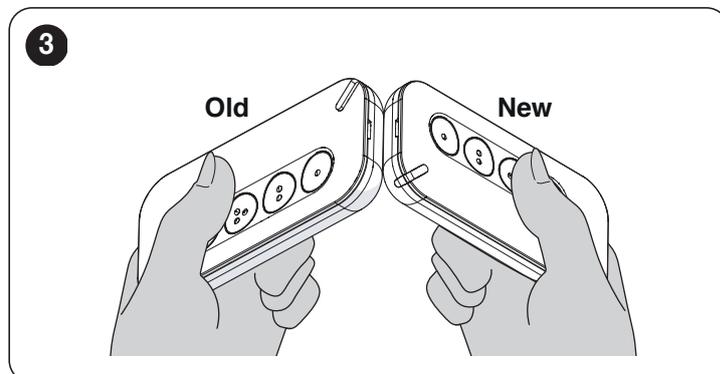


2. On the **OLD** (Old) transmitter press and hold any one of the command keys.

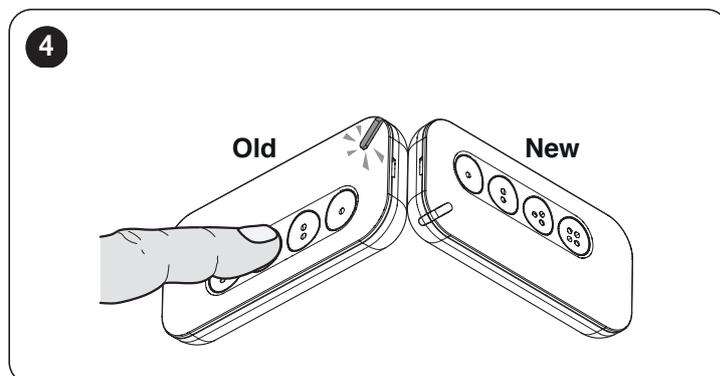


3. On the **NEW** (New) transmitter press and release any one of the command keys.

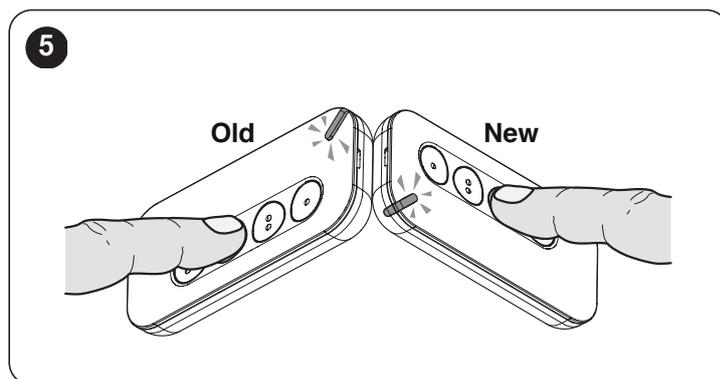

4. On the **OLD** (Old) transmitter release the key once the LED on the **NEW** (New) transmitter (**B**) lights up steady red.

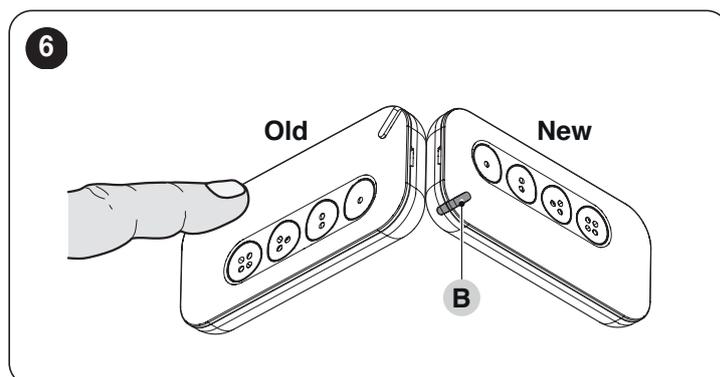

- On the OLD (Old) transmitter press and slowly release for three times any one of the command keys. With each pressing action, the LED on the NEW (New) transmitter (B) switches off and then on again.

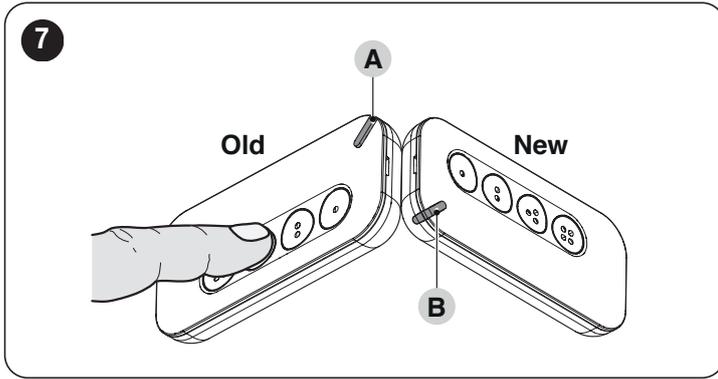

Once the procedure has terminated, the LED of the NEW (New) transmitter (B) flashes rapidly to signal the correct transfer of the code. If instead the LED of the NEW (New) transmitter (B) does not flash and switches off, the procedure was not completed correctly and must be redone.

 After passing the enabling code on the NEW transmitter, for the procedure to succeed the transmitter – within the first 20 transmissions – must be used at least once near the automation.

## 4 REPLACING THE BATTERY

 **Keep the new and used batteries out of reach of children.**


 **Do not swallow the batteries. Risk of chemical burns or even death.**

When the battery is flat and a key is pressed, the signalling LED fades and the transmitter does not transmit.


To restore normal transmitter operation, replace the battery with a version of the same type, while observing the polarity.

To change the battery:

- insert a screwdriver (or similar object) through hole (A) to unlock the casing (B) so that it can be removed

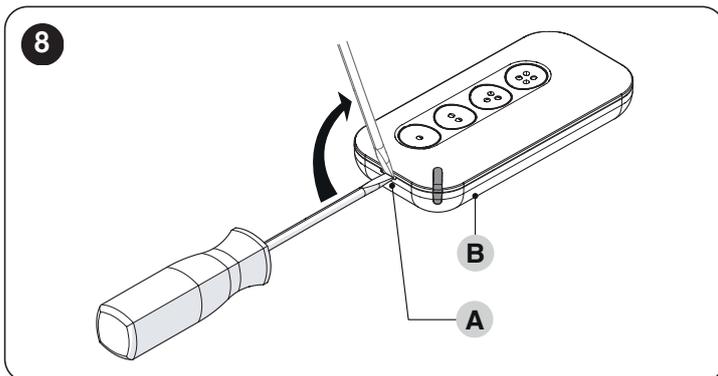


- press the battery in point (1) and twist the case (B) to release the battery from the clip holding it (2) so that it can be removed

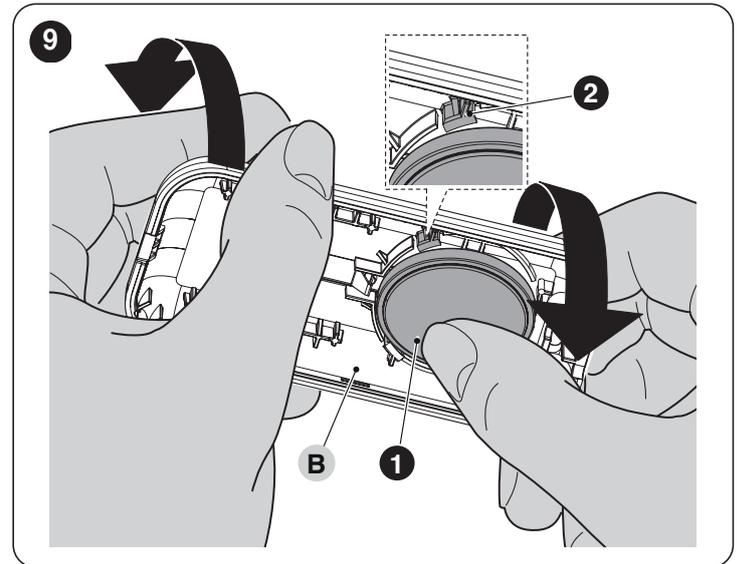


- replace the battery with another of the same type

 **When inserting the new battery, be careful to respect the polarity.**

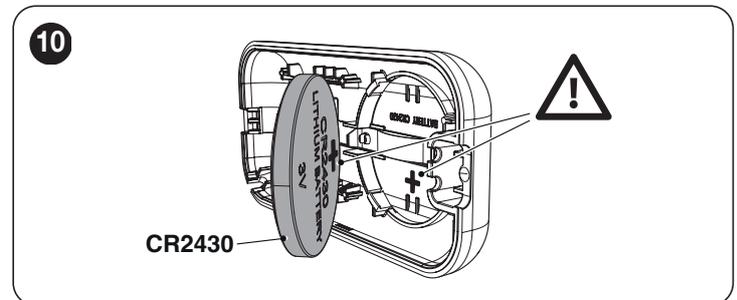


- reassemble the remote control by slotting the protruding parts (3) into their housings (4) and closing the front (C) so that it snaps onto the case (B).

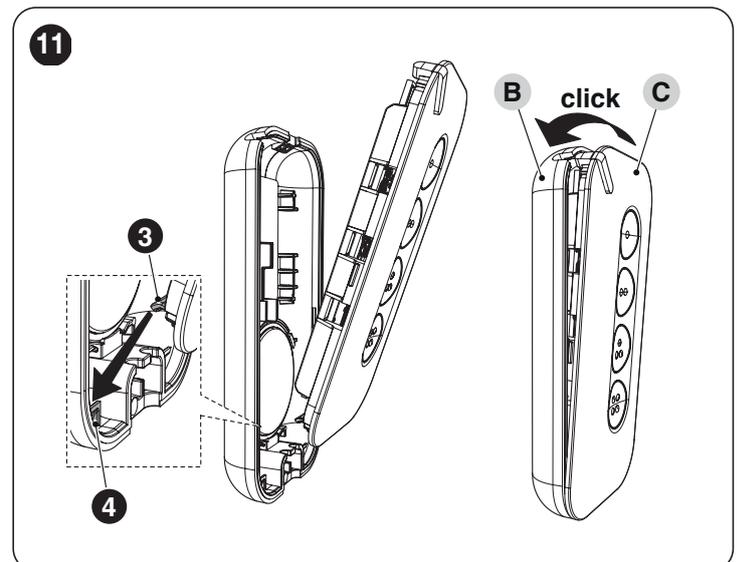

## 5 TRACEABILITY

Traceability indications (A):

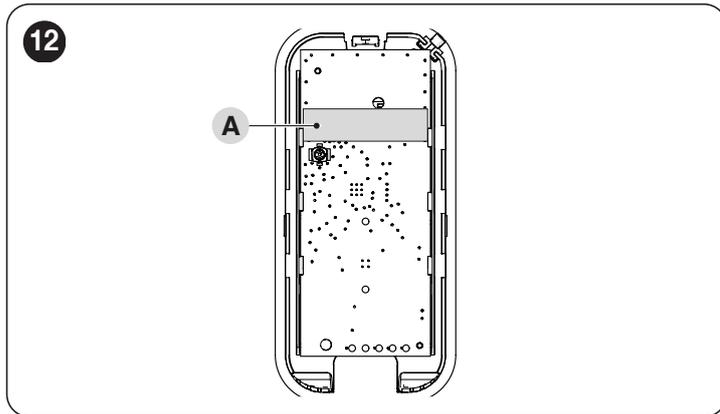

## 6 PRODUCT DISPOSAL

**This product is an integral part of the operator and must therefore be disposed of with it.**

As with the installation, only qualified personnel must dismantle the product at the end of its life.

This product is composed of different types of materials. Some of these materials can be recycled; others must be disposed of. Please enquire about the recycling or disposal systems in place in your local area for this type of product.

**WARNING**

Some parts of the product may contain polluting or dangerous substances. If not disposed of correctly, these substances may have a damaging effect on the environment and human health.

As indicated by the symbol shown here, this product must not be disposed of with household waste. Separate the waste for disposal and recycling, following the methods stipulated by local regulations, or return the product to the seller when purchasing a new product.



**WARNING**

Local regulations may impose heavy penalties if this product is not disposed of in compliance with the law.

## 6.1 BATTERY DISPOSAL

**WARNING**

The batteries must be removed from the appliance prior to its disposal.

The batteries must be disposed of in a safe way.

The flat battery contains toxic substances and must not be disposed of with common waste. Dispose of according to separate waste collection methods as envisaged by current local standards.

## 7 TECHNICAL SPECIFICATIONS

All technical specifications stated in this section refer to an ambient temperature of 20°C (± 5°C). Nice S.p.A. reserves the right to apply modifications to the product at any time when deemed necessary, without altering its functions and intended use.

The range of transmitters and the reception capacity of the receivers are heavily affected by other devices (alarms, headphones, etc.) operating on the same frequency in your area. Under such conditions, Nice S.p.A. cannot provide any guarantee with regard to the actual range of its devices.


Table 1

TECHNICAL SPECIFICATIONS	
Description	Technical specification
	<b>MYGO4/KR</b>
Product type	One-way transmitter
Power supply	3 Vdc lithium battery type CR2430
Battery life	approx. 3 years, with 10 command transmissions per day
Frequency	447.6 MHz
Radio encoding	K-Code
Operating temperature	-5°C ... +55 °C
Protection rating	IP 30 (suitable for use at home indoors or in outdoor areas under cover)
Dimensions	72 x 34 x 110h mm
Weight	20 g

## 8 ACCESSORIES

### 8.1 STRING FOR KEYRING

The string (A), supplied as an accessory with the transmitter, is useful for fastening the transmitter itself to a keyring or other similar object. To fasten it, wrap the string around slot (B) present on the transmitter.

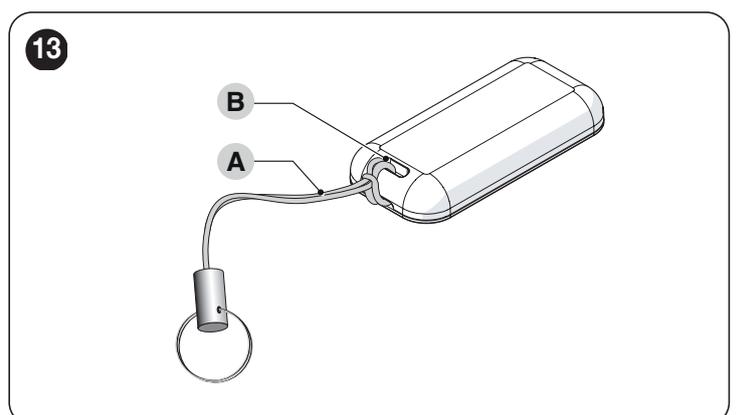

A series of 20 horizontal dashed lines spanning the width of the page, intended for handwriting practice.



**Nice SpA**  
Via Callalta, 1  
31046 Oderzo TV Italy  
info@niceforyou.com

[www.niceforyou.com](http://www.niceforyou.com)