




## **Cellcom Prime7**





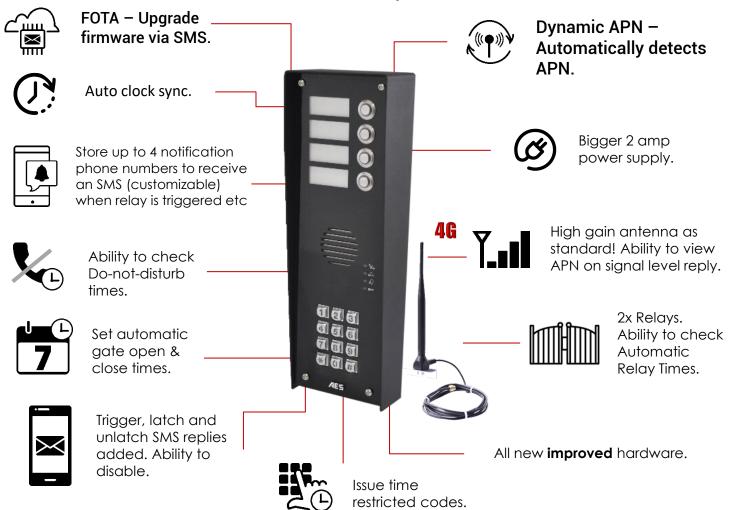

		Technical Details	
Dial Out Numbers	4	Relays	2
Permanent Codes/cards	250	Relay Type	N/C and N/O
Time Restricted Codes/cards	250	Relay Load	2 amps, 24v ac max
Temporary Codes/cards	50	Power Consumption	300mA on dial out, 2amp peak demand
Automatic Trigger Events per Week	50	Modem Models	4G Europe, 4G USA, 4G AUS/NZ
Caller ID Numbers	250	Power Supply	24v dc (24v 2A dc adaptor included)
Time Restricted Caller ID Numbers	250		



NEW AES PRO APP, user friendly. With Installer and homeowner capabilities.











## PRIME7-IBK2-US






## PRIME7-IBK3-US





## PRIME7-IBK4-US





All black panel with textured powder coated aluminium hood and gloss black acrylic faceplate trim, over a tough metal back plate.



