

BKV06AGF


Up to 600 kg - Rapid tall version for increased battery capacity



Ideal solution for connected sliding gates in homes and apartment blocks

- Encoder control.
- Complies with current standards on impact forces.
- Can operate in emergency mode during power outages.
- Can retrofit magnetic limit-switches and heater for extreme weather conditions.
- Electronic board, with separate terminal blocks and display, to facilitate start-up and diagnosis phases. Storing for up to 250 different users.
- Radio programming Rolling code and integrated Key Code (Twin).
- Management of the Rio series wireless security accessories using the dedicated plug-in accessory.
- Testing of safety circuits for CAT 2 safety products – whether wireless or not.
- Devices developed for connection to the cloud, via GAME Connect.
- Used to directly manage CAME key pads using the R800 accessory or connect CAME transponder selectors using the R700 accessory.
- Connection used with the RSE accessory.

Dimensions (mm)

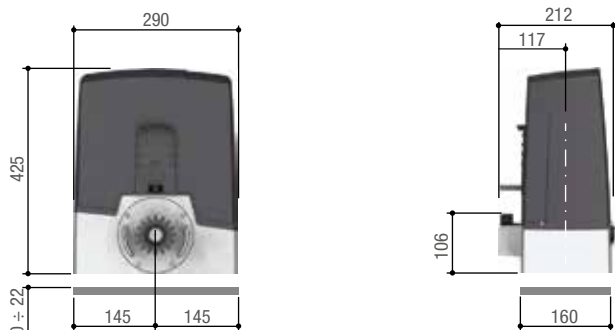

Battery type

MODEL	BATTERY TYPE (not supplied)
801MS-0190	2 x 12 V - 5 Ah

Operational limits

MODEL	801MS-0190
Max. length of leaf (m)	18
Max. weight of leaf (kg)	600

Technical characteristics

MODEL	801MS-0190
Protection rating (IP)	44
Power supply (V - 50/60 Hz)	230 AC
Power supply to motor (V)	24 DC
Absorption (A)	10 MAX
Maneuvering speed (m/min)	240
Duty/cycle (%)	HEAVY-DUTY SERVICE
Power (W)	330
Thrust (N)	-20 ÷ +55
Operating temperature (°C)	-20 ÷ +55