

XAS/301.01





Power supply



Power supply/repeater for 20 V DC - 800 mA audio, video and data signals.

- Plastic container for installing in EN50022 electrical panels, and eight-DIN low modules.
- Control board for directly supplying 20 V DC - 800 mA max. indoor receivers, with electronic overload and short-circuit protection.
- Equipped with terminals for IN/OUT connection from the riser column, 7 switches for signal compensation according to distances, 1 switch to allow the firmware update of the device to be carried out through the MINI USB connector and 1 button for resetting the device. Equipped with potentiometers for compensating audio volumes to and from the indoor receiver. 2 LEDs for checking the connection and data transfer. 230 V AC 50/60 Hz supply from the power grid. IP30 water and dust protection rating.

Dimensions (mm)

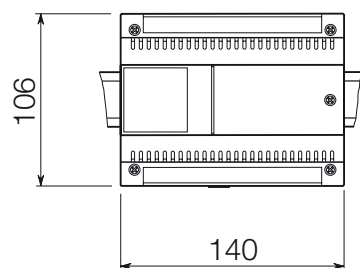

Technical characteristics

MODELS	XAS/301.01
60Hz (VAC) power supply	230
Absorbed current (mA AC)	400
Bus voltage (VDC)	20
Current available on the bus (A)	0.21
Protection rating (IP)	30
Operating temperature (°C)	0 to +35
Storage temperature (°C)	-25 to +70