




VISTA SW MXL

Automation for swinging pedestrian doors.

The Vista SW MXL is an automatic swing door operator for pedestrian doors and is suitable for a maximum leaf weight of 350kg, it is designed for intensive use. The Vista SW comes in two versions, MXL with motor closing and the SXL with return spring closing. The control unit has a programmable display and microprocessor technology, making it possible to control all the main functions automatically.



24v

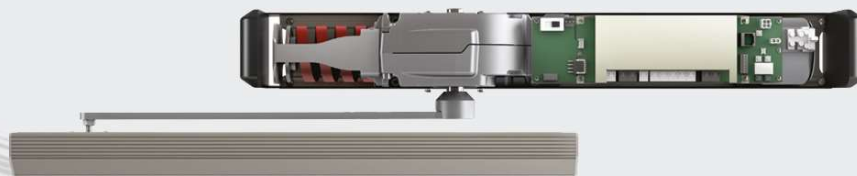

SPECIFICATIONS

	VISTA SW MXL
Motor type	24v DC Dunker
Control unit	Digital display and dip switch
Shaft max. output torque	85Nm
Open and close	Open and close with motor
Max. leaf weight	350kg
Max. opening angle	110°
Opening speed	up to 70°/sec
Closing speed	up to 40°/sec
Emergency operation	back-up batteries
Time of limit switch	encoder
Clear opening	700mm to 1400mm
Impact reaction	electronic torque limiter
Locking	solenoid lock
Manual cycle	reversible
Environmental conditions	from -10°C to 50°C
Protection rating	IP40



VISTA SW SXL (FIRE RATED)

Automation for swinging pedestrian doors.

The Vista SW SXL is an automatic swing door operator for pedestrian doors and is suitable for a maximum leaf weight of 350kg, it is designed for intensive use. The Vista SW comes in two versions MXL with motor closing and the SXL with return spring closing. The control unit has a programmable display and microprocessor technology, making it possible to control all the main functions automatically.

The spring version has achieved Fire certification carried out at Warrington Fire as suitable for use on fire rated doors. Certification available on request.



24v



SPECIFICATIONS

	VISTA SW SXL
Motor type	24v DC Dunker
Control unit	Digital display and dip switch
Shaft max. output torque	85Nm
Open and close	Motor open and close with return spring
Max. leaf weight	350kg
Max. opening angle	110°
Opening speed	up to 70°/sec
Closing speed	up to 40°/sec
Emergency operation	back-up batteries
Time of limit switch	encoder
Clear opening	700mm to 1400mm
Impact reaction	electronic torque limiter
Locking	solenoid lock
Manual cycle	reversible
Environmental conditions	from -10°C to 50°C
Protection rating	IP40